




Comacchio MC 602 Hydraulic Drill Rig

MC 602	
Undercarriage	
Wheel base	1600 mm
Max Width	1200-1600 mm
Pad Width	250 mm
Max Climbing Ability	36%
Max Speed	1 Km/h
Power Pack	
Diesel Engine	DEUTZ TCD 2011 L04 W
Engine Power	71,2 Kw (96,8 HP) at 2300 rpm
Hydraulic Pump	N°1 Double variable displacement load sensing 80 cc + 80 cc N°1 gear pump 16 cc N°1 gear pump 16 cc
Hydraulic Oil Tank	265 l
Diesel Tank	95 l
Mast	
Feed Stroke	950-2100 mm
Total Length	2355-3505 mm
Extension	1550 mm
Feed Stroke with Extension	2500-3650 mm
Total Length with Extension	3905-5055 mm
Feed Force	6000 daN
Retract Force	6000 daN
Rotary Head	
Type	EURODRILL RH 1700
Max. Torque	1680/2370 daNm
Max. Speed	86/60 rpm
Swivel Passage	2 in
Double Clamp	
Clamping Range	45-360 mm
Clamping Force	230 kN
Breaking Torque	2500 daNm
Winch	
Max Line Pull	1000 Kg
Top Crown Block	Manual Rotating



Comacchio MC 602 Hydraulic Drill Rig

MC 602	
Controls	
Set-Up	Radio
Tracks	Radio
Drilling	Radio
Weight	
Drill Unit	6000-6500 Kg
Diesel Power Pack	1800 Kg
Control Weight	1750 Kg
Options Available	
Hydraulic setting for Drifter (not operable in combination with flush pump)	
Hydraulic Drifter EURODRILL HD 4010 or HD 4008	
Hydraulic setting for Double Head rotary-rotary (not operable in combination with flush pump)	
Double head EURODRILL RH 1000 & RH 400	
Hydraulic setting for Flush pump (not operable in combination with Drifter)	
Water / Foam injection pump: 20 Lt/min – 150 bar	
DTH lubricator	
Electro hydraulic air gate valve 2"	
Power pack drive by a 75 Kw electric motor	

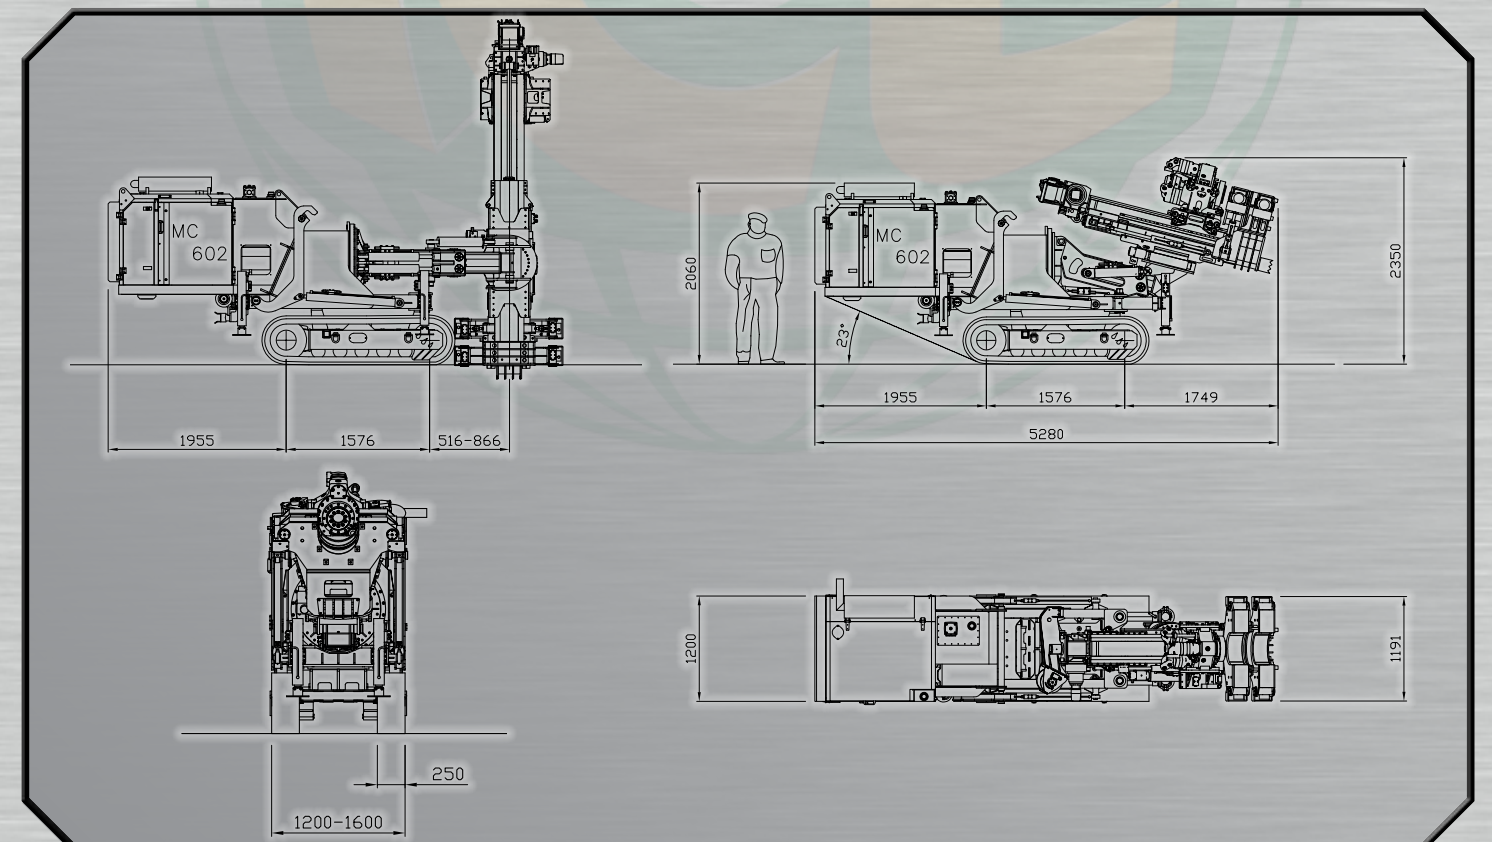

Constant improvement and engineering progress make it necessary that ICE®, Inc and COMACCHIO reserve the right to make specification changes without notice. Please consult ICE® for the latest available information.