



International Construction Equipment
 301 Warehouse Drive
 Matthews, NC 28104
 Phone: 704 821-8200
 Email info@iceusa.com



Comacchio MC 1200 Hydraulic Drill Rig

		MC 1200 mm	
Undercarriage			
Wheel base	9.5 ft	2900 mm	
Max Width	8.2 ft	2500 mm	
Pad Width	19.6 in	500 mm	
Max Climbing Ability	50%		
Max Speed	.93 mph	1.5 Km/h	
Power Pack			
Diesel Engine	DEUTZ TCD 2012LO4		
Engine Power	180 HP (132 Kw) / 2300 rpm		
Main Pump	2 x 50.2 gal/min.	2 x 190 l/min	
Oil Tank	105.6 gal	400 l	
Fuel Tank	92.5 gal	350 l	
Mast			
Feed Stroke	15.6/23.6/33.5 ft	4750/7200/10200 mm	
Total Length	23.3/31.3/41.2 ft	7100/9550/12550 mm	
Feed Force	17,984 lbs	80 kN	
Retract Force	17,984 lbs	80 kN	
Rotary Head			
Gears	6		
Max Torque	9,072 ft-lbs	12300 Nm	
Max Speed	340 - 550 rpm		
Head Passage	3.6 in	92 mm	
Swivel Passage	2 in		






Comacchio MC 1200 Hydraulic Drill Rig



MC 1200		
Clamps		
Min Handling	1.8 in	45 mm
Max Handling	14.1 in	360 mm
Clamping Force	62,946 lbs	280 KN
Breaking Torque	25,814 ft-lbs	35000 Nm
Winch		
Max Line Pull	4,496 lbs	20 kN
Drum Capacity	164 ft	50 m
Rope Speed	98 ft/min	30 m/min
Rope Diameter	.39 in	10 mm
Dimensions		
Length	35.8 ft	10.915 mm
Width	8.2 ft	2500 mm
Height	10.2 ft	3100 mm
Weight		
	40,000 lbs	20000 Kg

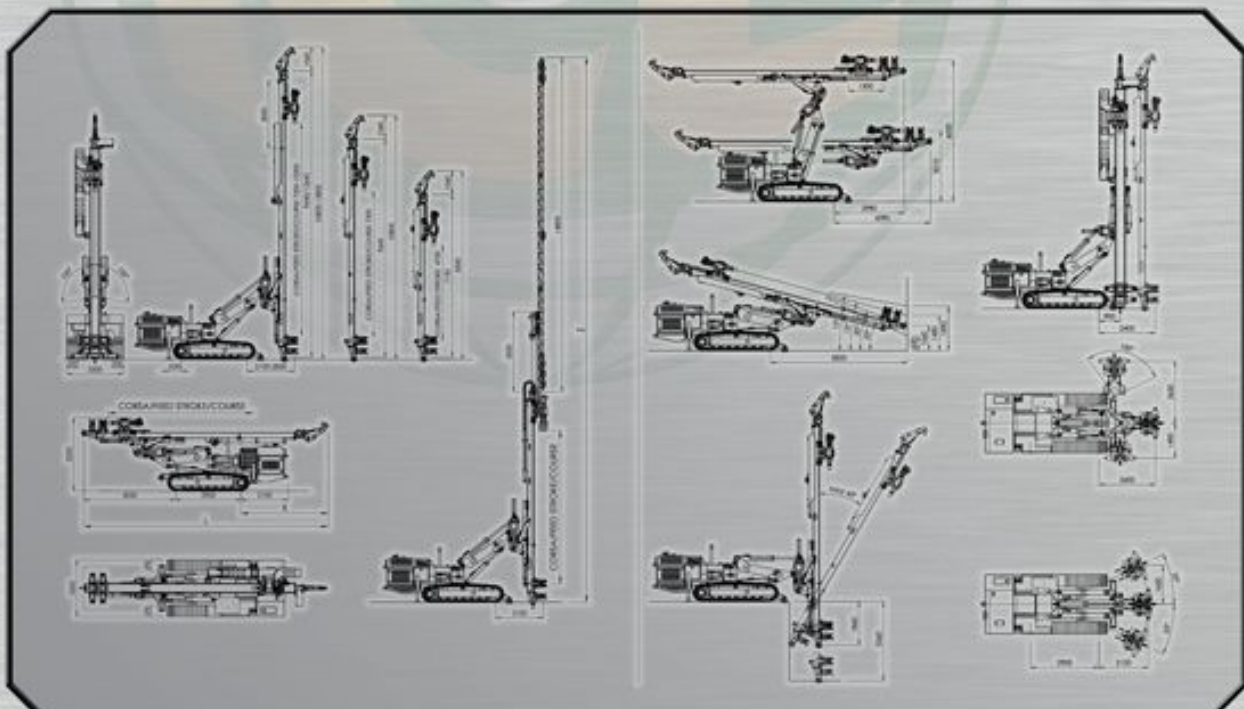

Constant improvement and engineering progress make it necessary that ICE®, Inc and COMACCHIO reserve the right to make specification changes without notice. Please consult ICE® for the latest available information.

"Due to improvements to ICE manufactured products and the EPA mandated Tier III emission regulations, unit specifications are subject to change without notice. Please contact ICE engineering department to confirm possible changes."