



International Construction Equipment
 301 Warehouse Drive
 Matthews, NC 28104
 Phone: 704 821-8200
 Email info@iceusa.com



Comacchio MCF 04.1 Hydraulic Drill Rig


MCF 04.1	
Undercarriage	
Wheel base	8.5 ft / 2600 mm
Max Width	7.5 ft / 2300 mm
Pad Width	17.7 in / 450 mm
Max Climbing Ability	50%
Max Speed	1.24 mph / 2 Km/h
Power Pack	
Diesel Engine	DEUTZ TCD 2013 L6 2V
Engine Power	255 HP (188 Kw) / 2,200 rpm
Main Pump	2 x 62 gal/min / 2 x 235 l/min
Oil Tank	157 gal / 600 l
Fuel Tank	53 gal / 200 l
Mast	
Feed Stroke	15.7/13.7 ft / 4800/4200 mm
Total Length	26.1 ft / 8000 mm
Feed Force	22,480 lbs / 100 kN
Retract Force	22,480 lbs / 100 kN
Hydraulic Drifter	
Type	HD5012/HD8021/HD8032
Double Head	
Rotary-Drifter	RH1400&HD4008 / RH1400&HD4010 / RH1400&HD5012
Rotary-Rotary	RH1700&CT35-36A / RH2100&CT35-36A / RH3200&CT35-36A



Comacchio MCF 04.1 Hydraulic Drill Rig



MCF 04.1			
Clamps			
Min Handling	1.8 in	45 mm	
Max Handling	14.1 in	360 mm	
Clamping Force	62,945 lbs	280 kN	
Breaking Torque	25,813 ft-lbs	35000 Nm	
Winch			
Max Line Pull	4,496 lbs	20 kN	
Drum Capacity	164 ft	50 m	
Rope Speed	130 ft/min	40 m/min	
Rope Diameter	.39 in	10 mm	
Dimensions			
Length	26.8 ft	8200 mm	
Width	7.5 ft	2300 mm	
Height	9.3 ft	2850 mm	
Weight		38,000 - 42,000 lbs	19000 - 21000 kg

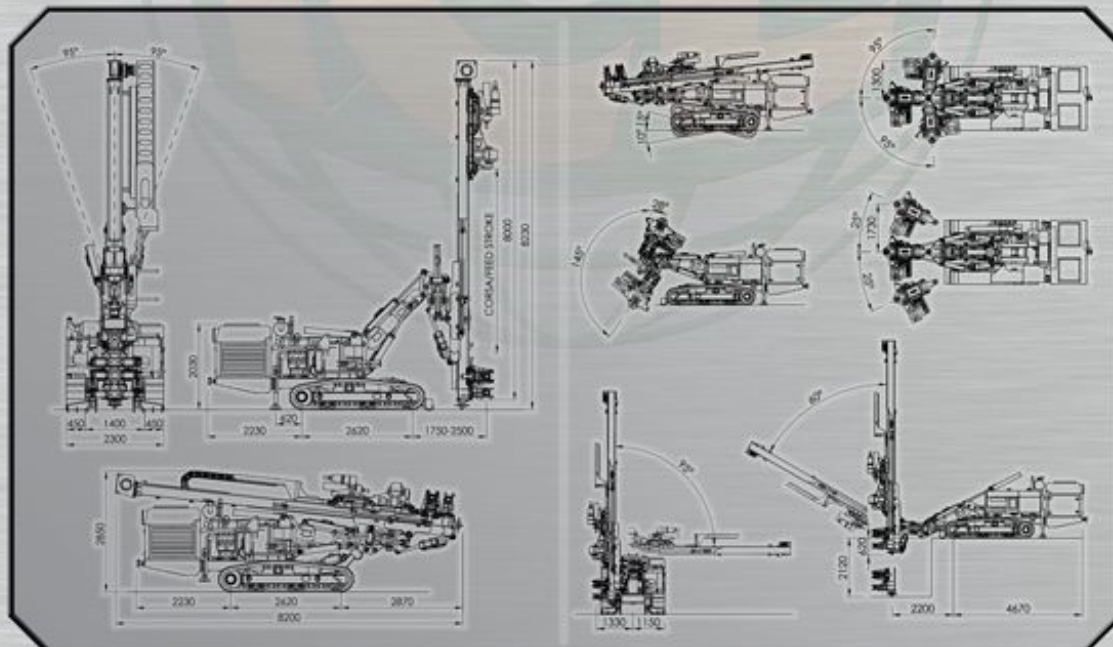

Constant improvement and engineering progress make it necessary that ICE®, Inc and COMACCHIO reserve the right to make specification changes without notice. Please consult ICE® for the latest available information.

"Due to improvements to ICE manufactured products and the EPA mandated Tier III emission regulations, unit specifications are subject to change without notice. Please contact ICE engineering department to confirm possible changes."